



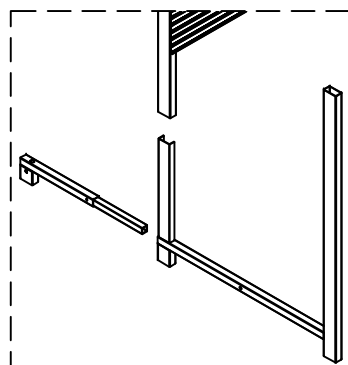


STEP 1

INSERT "J" LEG PANEL THEN INSERT LEG INTO "J" LEG




STEP 2

SLIDE COUNTER TOP ROD INTO "J" LEG AND PANEL FOR MORE STABILITY. SCREW EACH ROD WITH #10x3/4" L MOD TRUSS (SELF DRILLING SCREW)




STEP 3

CONNECT ALL ELECTRICAL BY DASIY CHAINS THEM TOGETHER (MAKE TO FOLLOW FLOW ARROWS)




OPTION WITH MORE THAN ONE WORKSTATION




BOLT EACH LEG & ROD WITH 1/4"-20x2-1/2"L HEX BOLT
1/4"Ø WASHER
1/4"-20 WING NUT


BOLT EACH LEG & ROD WITH 1/4"-20x2-1/2"L HEX BOLT
1/4"Ø WASHER
1/4"-20 WING NUT

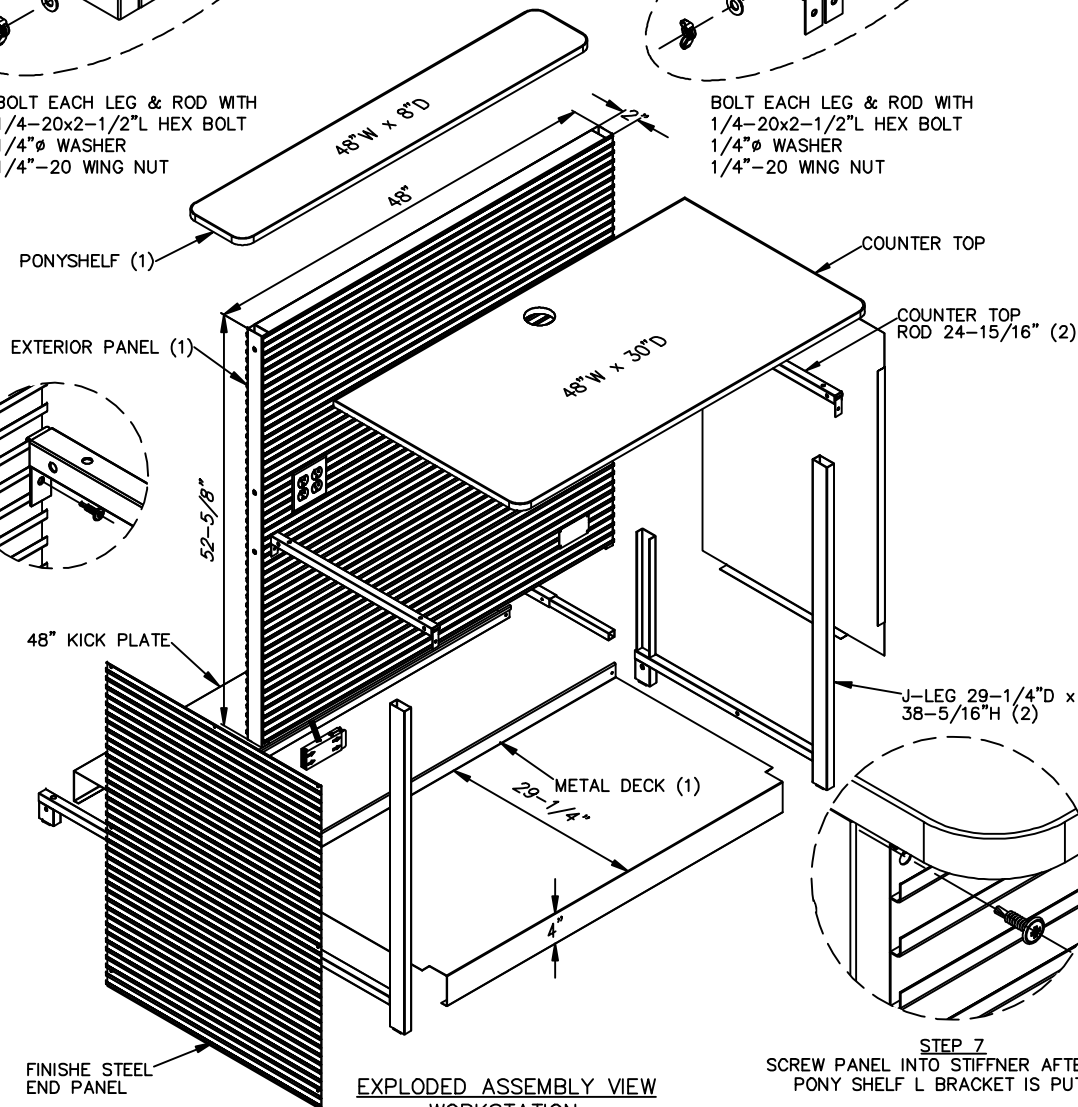

EXPLODED ASSEMBLY VIEW
WORKSTATION

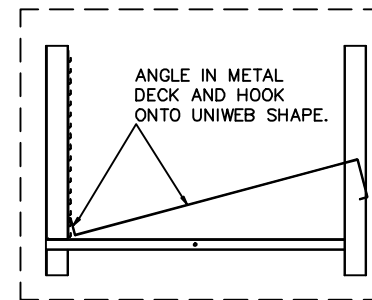


STEP 4




STEP 5

SCREW THROUGH COUNTER TOP ROD AND INTO COUNTER TOP



STEP 6

SCREW L BRACKET TO STIFFNER AND PONY SHELF (MAKE SURE PONY SHELF IS STRAIGHT AND LEVEL)



STEP 7

SCREW PANEL INTO STIFFNER AFTER THE PONY SHELF L BRACKET IS PUT IN

REFERENCE KEY

UNIWEB Part#

UNIWEB, INC.


222 So. Promenade Ave. Corona, California 92879 (909) 279-7999 800 4-UNIWEB UNIWEBINC.COM

DATE 5-9-02
SCALE N.T.S.
DRN A.M.

CUSTOMER


DESCRIPTION

48" Workstation Installation

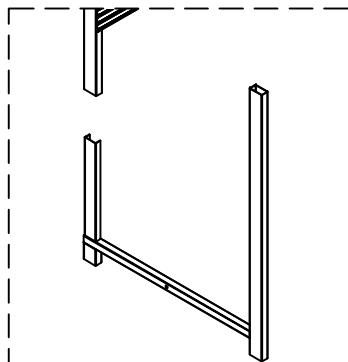


STEP 1

INSERT "J" LEG PANEL THEN INSERT LEG INTO "J" LEG




BOLT EACH LEG & ROD WITH
1/4"-20x2-1/2"L HEX BOLT
1/4"Ø WASHER
1/4"-20 WING NUT



STEP 2

SLIDE COUNTER ROD INTO "J" LEG
AND PANEL FOR MORE STABILITY
SCREW EACH ROD WITH #10x3/4"L
MOD TRUSS (SELF DRILLING SCREW)



COUNTER TOP ROD

EXTERIOR
PANEL (2)

FINISHED STEEL
END PANEL (2)


PONYSHELF (1)

METAL DECK (2)


COUNTER TOP (2)

J-LEG

EXPLODED ASSEMBLY VIEW
WORKSTATION

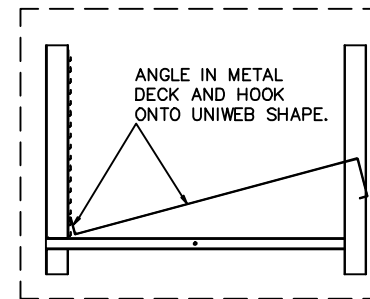


STEP 4




STEP 5

SCREW THROUGH COUNTER TOP ROD
AND INTO COUNTER TOP



STEP 6

SCREW L BRACKET TO
STIFFNER AND PONY SHELF
(MAKE SURE PONY SHELF IS
STRAIGHT AND LEVEL)



STEP 7

SCREW PANEL INTO STIFFNER AFTER THE
PONY SHELF L BRACKET IS PUT IN

REFERENCE KEY

UNIWEB Part#

UNIWEB, INC.

222 So. Promenade Ave. Corona, California 92879 (909) 279-7999 800 4-UNIWEB UNIWEBINC.COM

DATE 4-1-03
SCALE N.T.S.
DIN A.M.

CUSTOMER

DESCRIPTION

Workstation Installation